


Anritsu envision : ensure

Spectrum Master™ Ultraportable Spectrum Analyzer

MS2760A

9 kHz to 50 GHz, 70 GHz

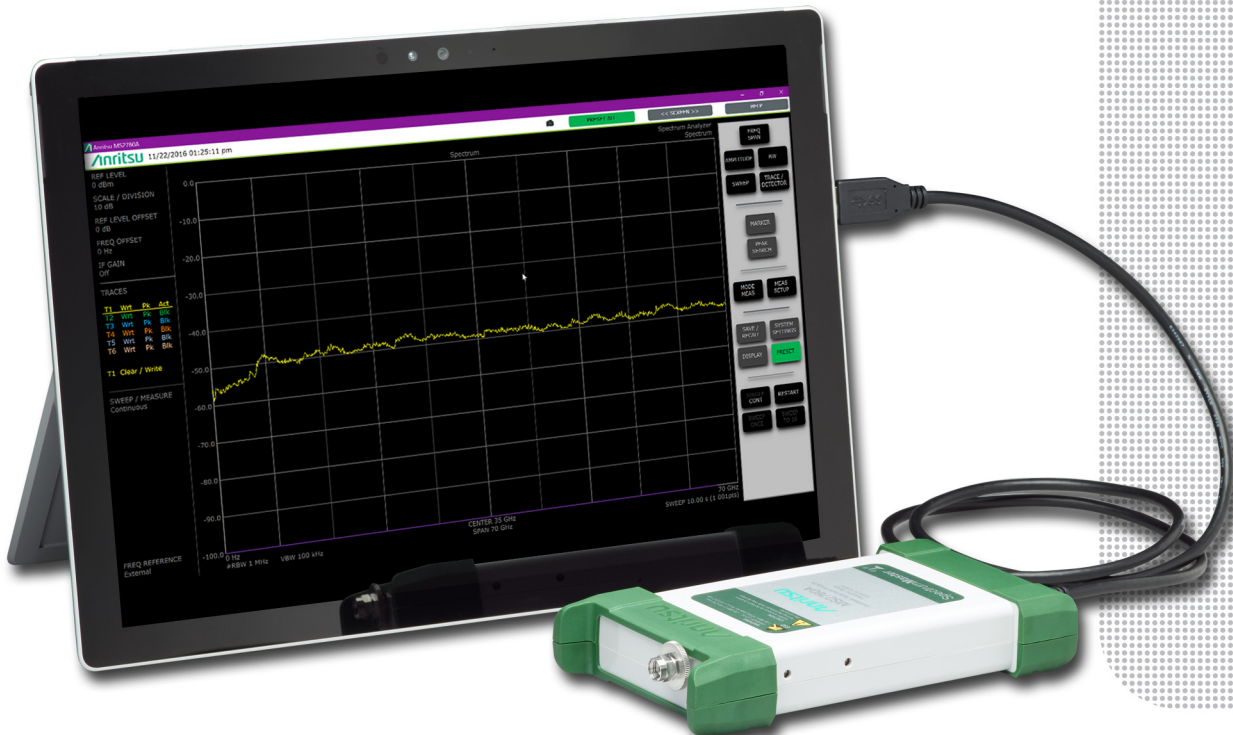

Introduction

From Anritsu, the inventor of the handheld spectrum analyzer first introduced in 1999, we are proud to introduce our first generation MS2760A Spectrum Master – Ultraportable Spectrum Analyzer. By utilizing Anritsu's patented shockline nonlinear transmission line (NLTL) technology, the MS2760A shatters the cost, size, and performance barriers associated with traditional large form-factor instruments to more efficiently advance technology development. The MS2760A is truly pocket sized, but big on performance with industry leading dynamic range, sweep speed, and amplitude accuracy.

Its ultraportable size enables direct connect to almost any DUT, eliminating the need for lossy, expensive cables or antennas. The MS2760A is the world's first handheld millimeter-wave spectrum analyzer to provide continuous coverage from 9 kHz up to 70 GHz, positioning it perfectly for growing millimeter-wave applications like 5G, 802.11ad, satellite communications, and more. The MS2760A is USB-powered and controlled from a Windows-based PC, laptop, or tablet, making it uniquely flexible for use in the lab, on the manufacturing floor, or in the field.

Spectrum Analyzer Highlights

- Measure: Channel Power, Adjacent Channel Power, Occupied Bandwidth
- Dynamic Range: > 103 dB from 6.15 GHz up to 70 GHz
- DANL: -132 dBm up to 70 GHz
- Resolution Bandwidth (RBW): 10 Hz to 3 MHz
- Phase Noise: -116 dBc/Hz @ 1GHz
- Up to Six Traces, Three Trace Detectors, 12 Markers
- I/O: External 10 MHz Frequency Reference

US Patents

The MS2760A is protected by the following US patents: 6,894,581; 7,683,633; 8,417,189; 9,287,604

Table of Contents

Definitions..... 3

Spectrum Analyzer 4

 Smart Measurements 4

 Setup Parameters 4

 Sweep Functions 4

 Trace Functions 4

 Marker Functions..... 4

 Limit Line Functions 4

 Frequency 4

 Bandwidth..... 4

 Spectral Purity – SSB Phase Noise..... 5

 Amplitude Ranges 5

 Amplitude Accuracy..... 5

 Displayed Average Noise Level (DANL) 5

 Spurs 5

 Third-Order Intercept (TOI) 5

 Second Harmonic Distortion 5

 Input Match 5

General Specifications 6

 Setup Parameters 6

 Connectors 6

 Computer Requirement 6

 Environmental 6

 Electromagnetic Compatibility 6

 Warranty 6

 Size and Weight 6

Ordering Information – Options 7

Standard Accessories 7

Manuals..... 7

Optional Accessories..... 8

 Coaxial Adapters 8

 Precision Fixed Attenuators 8

 Precision Waveguide Coaxial Adapters 8

 Waveguide to Coaxial End Launch Adapters..... 8

 Directional Horn Antennas..... 9

 Test Port Cables (Armored, Semi-rigid) 9

Definitions

All specifications and characteristics apply to Revision 1 instruments under the following conditions, unless otherwise stated:

- After 5 minutes of warm-up time, where the instrument is left in the ON state
- When using the internal reference signal

Typical Specifications Typical specifications are not tested and not warranted. They are generally representative of characteristic performance.

Calibration Cycle Recommended calibration cycle is 12 months.

Time Base Error Input Frequency × Frequency Reference Error

All specifications subject to change without notice. For the most current data sheet, please visit www.anritsu.com



Spectrum Analyzer

Smart Measurements

Channel Power	Measures the total power in a specified bandwidth
Occupied Bandwidth	Measures 99 % to 1 % power channel of a signal
Adjacent Channel Power	Measures channel power of the adjacent channel

Setup Parameters

Frequency	Center/Start/Stop, Span, Span Up/Down (1-2-5), Frequency Step, Frequency Offset
Span	Span, Span Up/Down (1-2-5), Full Span, Last Span
Bandwidth	RBW, Auto RBW, VBW, Auto VBW, RBW/VBW, Span/RBW
Amplitude	Reference Level, Scale / Division, Ref Level Offset

Sweep Functions

Sweep	Single/Continuous, Restart, Sweep Once, Sweep to N
-------	----------------------------------------------------

Trace Functions

Traces	Up to six traces
Trace Type	Clear / Write, Trace Average, Max Hold, Min Hold, Rolling Average, Rolling Max Hold, Rolling Min Hold
Trace Mode	Active, Hold / View, Blank
Detector Type per Trace	Peak, RMS / Avg, Negative

Marker Functions

Markers	Up to 12 Markers
Marker Mode	Normal, Delta, Fixed
Delta Marker	Relative to any Normal or Fixed Marker
Marker Trace	Assign Marker to any Trace
Peak Search	Peak Search, Next Peak, Next Peak Left, Next Peak Right, Next Point Left, Next Point Right
Peak Search Setup	Peak Threshold, Peak Excursion
Marker →	Mkr → Center, Mkr → Ref Level

Limit Line Functions

Limit Setup	Upper/Lower, Limit On/Off, Limit Alarm On/Off, Set Default Limit Line, Absolute/Relative, Mirror On/Off
Limit Line Edit	Frequency, Amplitude, Add Point, Add Vertical, Delete Point, Next Point Left/Right
Limit Line Move	To Current Center Frequency, By dB or Hz, To Marker 1, Offset from Marker 1
Limit Line Envelope	Create Envelope, Update Envelope, Points (41 max), Offset, Shape Square/Slope

Frequency

Frequency Range	(usable to 0 Hz)
MS2760A-0050	9 kHz to 50 GHz
MS2760A-0070	9 kHz to 70 GHz
Tuning Resolution	1 kHz
Frequency Reference	Aging: ± 1.0 ppm/year Accuracy: ± 0.2 ppm ($25\text{ }^{\circ}\text{C} \pm 25\text{ }^{\circ}\text{C}$) + aging
Frequency Span	10 Hz to maximum frequency range of instrument

Bandwidth

Resolution Bandwidth (RBW)	10 Hz to 3 MHz
Video Bandwidth (VBW)	10 Hz to 3 MHz
VBW/Average Type	Linear / Log



Spectrum Analyzer (continued)

Offset	Spectral Purity – SSB Phase Noise (dBc/Hz, 20 °C to 30 °C)							
	1 GHz (typical)	6 GHz (maximum)	6 GHz (typical)	30 GHz (maximum)	30 GHz (typical)	60 GHz (maximum)	60 GHz (typical)	
1 kHz	-100	-80	-88	-66	-74	-60	-69	
10 kHz	-110	-95	-104	-81	-88	-75	-84	
100 kHz	-116	-95	-104	-81	-88	-75	-84	

Amplitude Ranges

Dynamic Range	> 103 dB typical at 70 GHz, 2/3 (TOI - DANL) in 1 Hz RBW
Measurement Range	DANL to +20 dBm
Display Range	1 dB to 15 dB/div in 1 dB steps, ten divisions displayed
Reference Level Range	-120 dBm to +30 dBm
Amplitude Units	dBm
Maximum Safe Level Input	+20 dBm peak, ±10 VDC

Amplitude Accuracy

Frequency	20 °C to 30 °C (after 30 minute warm-up)		0 °C to 50 °C (after 60 minute warm-up)	
	maximum (dB)	typical (dB)	maximum (dB)	typical (dB)
9 kHz to 644 MHz	±1.3	±0.5	±2.5	±0.5
> 644 MHz to 40 GHz	±1.8	±0.5	±2.5	±0.5
> 40 GHz to 70 GHz	±2.0	±0.5	±2.5	±0.5

Displayed Average Noise Level (DANL) (RMS detection, VBW/Avg type = Log, IF Gain On)

Frequency	maximum (dBm)	typical (dBm)
10 MHz to 644 MHz	-131	-134
> 644 MHz to 4 GHz	-136	-140
> 4 GHz to 40 GHz	-131	-134
> 40 GHz to 70 GHz	-128	-132

Spurs

Residual Spurs	maximum (dBc)	typical (dBc)
10 MHz to 70 GHz	-85	-95
Input-related Spurious	(< -60 dBc, -10 dBm input, carrier offset > 5 MHz)	
28 MHz	-50 dBc @ 70 MHz	
35 MHz	-50 dBc @ 133 MHz	
770 MHz	-40 dBc @ 3430, 4970, 7630 MHz	
910 MHz	-40 dBc @ 4970, 6790 MHz	

Third-Order Intercept (TOI) (typical, 0 dBm tones 1 MHz apart, 0 dBm reference level)

2 GHz	+35 dBm
18 GHz	+35 dBm

Second Harmonic Distortion (at 1 GHz input)

0 dBm Input	-50 dBc maximum
-20 dBm Input	-60 dBc maximum

Input Match (typical)

Frequency	VSWR	Return Loss
9 kHz to ≤ 12.4 GHz	1.29:1	18 dB
> 12.4 GHz to 26.5 GHz	1.43:1	15 dB
> 26.5 GHz to 40 GHz	1.58:1	13 dB
> 40 GHz to 50 GHz	1.67:1	12 dB
> 50 GHz to 70 GHz	2.10:1	9 dB

General Specifications

Setup Parameters

System Status	Connected Port, Model, Serial Number, Software Version, Frequency, Options
Preset	Preset Traces, Preset Markers, Preset Limit Lines, Preset Meas Setup, Preset All
Save/Recall	Save As, Save (Measurement, Set-up PNG, Limit Line), Recall, Save on Event (Crossing Limit, Sweep Complete, Save at Interval)

Connectors

RF In	50 GHz and 70 GHz Instruments: V Connector (1.85 mm), male 50 Ω
USB Interface	USB 3.0, Type C Connector
External Reference In	MCX(f), 50 Ω , 10 MHz
(Future Use)	MCX(f), 50 Ω

Computer Requirement

Display Resolution	16:9 / 16:10 Aspect Ratio (>1280 x 720 / 1280 x 800)
Operating System	Windows® 7, 8.1, 10
Minimum Configuration	Quad Core i7 fourth generation or higher CPU, 16 GB RAM, 128 GB Data Storage, USB 3.0

Environmental (not including Windows Tablet/Laptop/PC)

Operating Temperature	-10 °C to 50 °C
Maximum Humidity	95 % non-condensing
Vibration, Shock, Temperature, Humidity	MIL-PRF-28800F Class 3
Storage	-40 °C to 71 °C
Altitude	4600 meters, operating and non-operating

Electromagnetic Compatibility (not including Windows Tablet/Laptop/PC)

European Union	CE Mark
EMC	2014/30/EU
Safety	2014/35/EU
RoHS	2011/65/EU
Australia and New Zealand	RCM
South Korea	KCC

Warranty

Duration	Standard three-year warranty
----------	------------------------------

Size and Weight (not including Windows Tablet/Laptop/PC)

Size	155 mm x 84 mm x 27 mm (6.1 in x 3.3 in x 1.1 in)
Weight	255 g (9.0 oz)

Ordering Information – Options

Part Number	Description
MS2760A	Ultraportable Spectrum Master Family (select a model below)
MS2760A-0050	Frequency Range 9 kHz to 50 GHz
MS2760A-0070	Frequency Range 9 kHz to 70 GHz

General Options

MS2760A-0050-0098	Standard Calibration (ANSI Z540-1-1994)
MS2760A-0070-0098	
MS2760A-0050-0099	Premium Calibration (ANSI Z540-1-1994 plus test data)
MS2760A-0070-0099	

Standard Accessories (Included with instrument)

Part Number	Description
2300-1859-R	USB 3.0 Type C to Type A Cable
2300-1605-R	BNC(m) to MCX(m) Cable (qty 2)
	Certificate of Calibration and Conformance

Manuals (available at www.anritsu.com)

Part Number	Description
10580-00427	User Guide

Optional Accessories

Coaxial Adapters



Part Number Description

34VFK50	DC to 40 GHz, V(f) to K(m), 50 Ω
34VFKF50	DC to 40 GHz, V(f) to K(f), 50 Ω
34VV50	DC to 65 GHz, V(m) to V(m)
34VVF50	DC to 65 GHz, V(f) to V(m)
34VVF50	DC to 65 GHz, V(f) to V(f)

Precision Fixed Attenuators



Part Number Description

41KB-3	DC to 26.5 GHz, 1W, 3 dB, K(m) to K(f)
41KB-6	DC to 26.5 GHz, 1W, 6 dB, K(m) to K(f)
41KB-10	DC to 26.5 GHz, 1W, 10 dB, K(m) to K(f)
41KB-20	DC to 26.5 GHz, 1W, 20 dB, K(m) to K(f)
41KC-3	DC to 40 GHz, 1W, 3 dB, K(m) to K(f)
41KC-6	DC to 40 GHz, 1W, 6 dB, K(m) to K(f)
41KC-10	DC to 40 GHz, 1W, 10 dB, K(m) to K(f)
41KC-20	DC to 40 GHz, 1W, 20 dB, K(m) to K(f)
41V-3	DC to 65 GHz, 1W, 3 dB, V(m) to V(f)
41V-6	DC to 65 GHz, 1W, 6 dB, V(m) to V(f)
41V-10	DC to 65 GHz, 1W, 10 dB, V(m) to V(f)
41V-20	DC to 65 GHz, 1W, 20 dB, V(m) to V(f)

Precision Waveguide Coaxial Adapters



Part Number Description

35WR22VF	33.0 to 50.0 GHz, WR22 to V(f)
35WR19VF	40.0 to 60.0 GHz, WR19 to V(f)
35WR15VF	50.0 to 65.0 GHz, WR15 to V(f)

Waveguide to Coaxial End Launch Adapters



Part Number Description

1091-460-R	17.6 to 26.7 GHz, WR42 to V(f)
1091-459-R	26.4 - 40.1 GHz, WR28 to V(f)
1091-458-R	33.0 - 50.1 GHz, WR22 to V(f)
1091-457-R	39.3 to 59.7 GHz, WR19 to V(f)
1091-456-R	49.9 to 75.8 GHz, WR15 to V(f)

Optional Accessories (continued)

Directional Horn Antennas



Part Number Description

2000-1867-R	17.6 to 26.7 GHz, WR42, 25 dBi gain
2000-1868-R	26.4 to 40.1 GHz, WR28, 25 dBi gain
2000-1869-R	33.0 to 50.1 GHz, WR22, 25 dB gain
2000-1870-R	39.3 to 59.7 GHz, WR19, 25 dBi gain
2000-1871-R	49.9 to 75.8 GHz, WR15, 25 dBi gain
2000-1872-R	60.0 to 90.0 GHz, WR12, 25 dBi gain
2000-1873-R	75.0 to 110.0 GHz, WR10, 25 dBi gain

Test Port Cables (Armored, Semi-rigid)



Part Number Description

3670K50-1	DC to 40 GHz, K(f) to K(m), 30.5 cm (1 ft)
3670K50-2	DC to 40 GHz, K(f) to K(m), 61.0 cm (2 ft)
3670V50A-1	DC to 70 GHz, V(f) to V(m), 30.5 cm (1 ft)
3670V50A-2	DC to 70 GHz, V(f) to V(m), 61.0 cm (2 ft)

Notes

Notes

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: www.anritsu.com/training



• United States

Anritsu Company

1155 East Collins Blvd, Suite 100
Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 Bela Vista, São Paulo, SP, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green
Luton, Bedfordshire LU1 3LU
United Kingdom
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec
Bâtiment Iris 1-Silic 612
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129
00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Kistagången 20B
164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kay Fiskers Plads 9
2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain

Anritsu EMEA Ltd.

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 8
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office
902, Aurora Tower,
P O Box: 500311- Dubai Internet City
Dubai, United Arab Emirates
Phone: +971-4-3758479
Fax: +971-4-4249036

• India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shiro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

27th Floor, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower
Concordia Plaza
No. 1 Science Museum Road, Tsim Sha Tsui East
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty. Ltd.

Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20160317